


# MODUFLEX LOADING CHUTE K500



## GENERAL

Brand	Cimbria
Designation	Moduflex Loading Chute
Model	K500
Use	Designed for dust-free out-loading of dry bulk material.

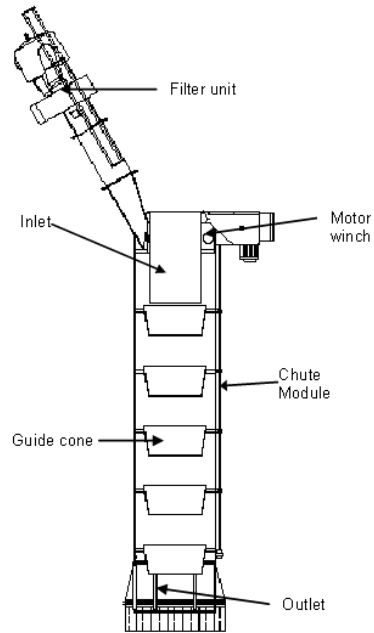

## Technical Information - K500

Inlet	Cylindrical Inlet tube in 2 mm steel. With Ø500 connection flange. Sidemounted filter module with built-in cartridge filter, pressure tank, magnetic valves etc. 9 off filter cartridges, totals 9 m <sup>2</sup> , alternatively 14 m <sup>2</sup> or 18 m <sup>2</sup> . Fan with 0,75 kW motor. Alternatively 1,5 kW mounted at site.
Chute modules	Type E - Extended: Yellow. PVC/Polyester. Ø800mm/H=600mm. Temperature -35°C - +70°C Type M - Food Grade: Light Grey. PVC/Polyester. Ø800mm/H=600mm. Temperature -30°C - +70°C Type W - Special: Misc. PVC/Polyester. Ø800mm/H=600mm. Temperature -35°C - +70°C Type B - Heavy Duty: Black. Synthetic rubber. Ø800mm/H=600mm. Temperature -40°C - +130°C Type G - Extreme Temperature: Grey. Teflon/Fiber glass. Ø800mm/H=600mm. Temperature -35°C - +260°C Type R-High Temperature: Red. Polyester and fiber/silicone. Ø800mm/H=600mm. Temperature: -40°C - +150°C (peak + 220°C) Type Z - Low temperature: Green. PVC/PU. Ø800mm/H=600mm. Temperature -60°C - +70°C Connection ring in stainless steel Aisi 304, c/w 3 off wire guides in nylon.
Guide cones	Type J - Steel Standard. Steel, H=300mm, pt=2mm.
Outlet	Type F - Flat Outlet with dust skirt for loading in open truck. Type T for closed loading
Motor winch	Motor 0.55-2.2 kW, 1400 rpm. Gear box ratio 100:1. Tight and slack wire indication External 3-point wire hoist system with high precision ball bearings and 3 off winch discs vertically fitted. Hoist wires Ø5mm available in steel, stainless steel Aisi316 or Long Life steel quality. Self-lubricating wire rollers in Ertalite TX, alternatively steel/stainless steel with bronze bearing
General info	Max. loading capacity approx. 700 m <sup>3</sup> /hour. Compressed air supply, clean and dry for filter: Connection 5-6 bar. Filter cleaning air consumption 100-150 NL/min. Pressure air connection ½". Metal parts available in painted steel st. 37 or stainless steel Aisi 304. Other steel qualities on demand. Surface treatment St. 37: Iron phosphating, 80 micron coating RAL 9010 pure white. Surface treatment Aisi 304: Acid-washed without any further treatment Motor winch cover in steel - RAL 6005 dark green. Cover on filter RAL 6005 Available with full approval and certificates for location in ATEX zone 21 and 22 (zone 20 inside the chute)

Accessories for Loading Chute K500, please see separate Data Sheet

# MODUFLEX LOADING CHUTE

# K500

K500			
	Outlet type FS		
Cone	Steel		
M	L1	L2	L3
4	3 625	1 485	2 140
5	4 230	1 555	2 675
6	4 835	1 625	3 210
7	5 440	1 695	3 745
8	6 045	1 765	4 280
9	6 650	1 835	4 815
10	7 255	1 905	5 350
11	7 860	1 975	5 885
12	8 465	2 045	6 420
13	9 070	2 115	6 955
14	9 675	2 185	7 490
15	10 280	2 255	8 025
16	10 885	2 325	8 560
17	11 490	2 395	9 095

