


MODUFLEX LOADING CHUTE S500

GENERAL

Brand	Cimbria
Designation	Moduflex Loading Chute
Model	S500
Use	Designed for dust-free out-loading of dry bulk material.

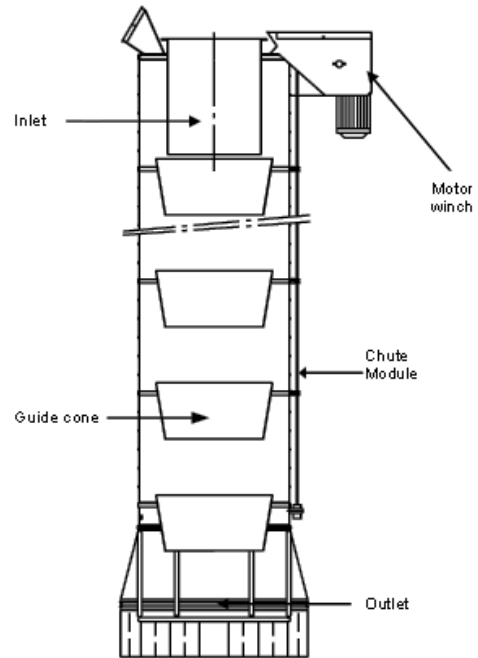

Technical Information - S500

Inlet	Cylindrical Inlet tube in 2 mm steel. With Ø500 connection flange. Mounted with 16 off M10 bolts. Exhaust connection Ø200.
Chute modules	Type E - Extended: Yellow. PVC/Polyester. Ø800mm/H=600mm. Temperature -35°C - +70°C Type M - Food Grade: Light Grey. PVC/Polyester. Ø800mm/H=600mm. Temperature -30°C - +70°C Type W - Special: Misc. PVC/Polyamide. Ø800mm/H=600mm. Temperature -35°C - +70°C Type B - Heavy Duty: Black. Synthetic rubber. Ø800mm/H=600mm. Temperature -40°C - +130°C Type G - Extreme Temperature: Grey. Teflon/Fiber glass. Ø800mm/H=600mm. Temperature -35°C - +260°C Type R - High temperature: Red. Polyester and fiber/silicone rubber. Ø800/H=600mm. Temp. -40°C - +150°C (peak +220°C) Type Z - Low temperature: Green. PVC/PU. Ø800mm/H=600mm. Temperature -60° C - +70° C Connection ring in stainless steel Aisi 304, c/w 3 off wire guides in nylon.
Guide cones	Type J - Steel Standard. Steel, H=300mm, pt=2mm.
Outlet	Type F - Flat Outlet with dust skirt for loading in open truck.
Motor winch	Motor 0.55- 2.2 kW, 1400 rpm. Gear box ratio 100:1. Tight and slack wire indication External 3-point wire hoist system with high precision ball bearings and 3 off winch discs vertically fitted. Hoist wires Ø5mm available in steel, stainless steel Aisi316 or Long Life steel quality. Self-lubricating wire rollers in Ertalite TX, alternatively steel/stainless steel with bronze bearing
General info	Max. loading capacity approx. 700 m ³ /hour. Recommended connecting value for aspiration 2200 m ³ /hour 500-1500 Pa. Metal parts available in painted steel st. 37 or stainless steel Aisi 304. Other steel qualities on demand. Surface treatment St. 37: Iron phosphating, 80 micron coating RAL 9010 pure white. Surface treatment Aisi 304: Acid-washed without any further treatment Motor winch cover in steel - RAL 6005 dark green Available with full approval and certificates for location in ATEX zone 21 and 22 (zone 20 inside the chute)

MODUFLEX LOADING CHUTE

S500

Outlet type FS			
Cone	Steel		
	L1	L2	L3
M			
4	3 328	1 188	2 140
5	3 933	1 258	2 675
6	4 538	1 328	3 210
7	5 143	1 398	3 745
8	5 748	1 468	4 280
9	6 353	1 538	4 815
10	6 958	1 608	5 350
11	7 563	1 678	5 885
12	8 168	1 748	6 420
13	8 773	1 818	6 955
14	9 378	1 888	7 490
15	9 983	1 958	8 025
16	10 588	2 028	8 560
17	11 193	2 098	9 095

